


Itty Bitty Micro Company
8080 Future Drive
Rochester, NY 14650

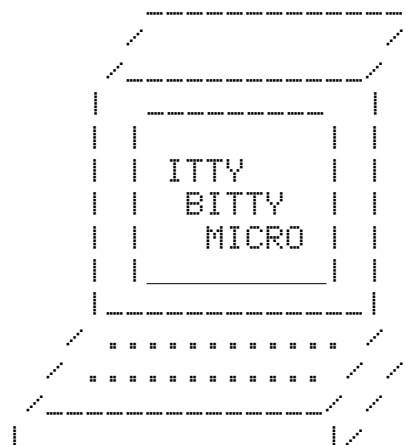

January 22, 1980

Dear Wiz,

I know, I know... the West Coast Computer Faire is coming up FAST! You SAID you're on vacation; but I KNOW you, man! You're probably still at home, hacking on that PDF-8 you got at the hamfest.

Well, forget that old crap. THIS IS IMPORTANT! The boards for "Project Z" arrived. PLEASE get them assembled and working NOW! If we don't have something INCREDIBLE for the show, we're dead! I already talked to Jim Warren, and got a great booth at the show, right across from Heathkit.

I put everything in the box we could find. You've got the boards (aren't they GORGEOUS?), all the parts (I hope!), and every scrap of PAPER CHIP thought you might need. Crash also burned his latest monitor program into the EPROM, and wrote some docs on it.

Remember, this is going to be the world's first POCKET COMPUTER! There's no time to get a custom case; so for now just stick it in an Altoids tin. It's a hacker classic, and "everyone knows" you can't make a computer that small (but WE can)! In a world full of big beige boxes, we've got something people will REMEMBER! This is going to be SO much more powerful than your little "Altair 8800" (that Altair 8080 in a Altoids tin)!

Yours truly,


Gil Bates
Emperor of Marketing
Itty Bitty Micro Company

cc: Chip Hacker, hardware herder
Crash Kernigan, codemeister
Wiz Wireman, solderking
Trace Weaver, PCB artiste

Z80's Computing

8bitz

BY LEE HART

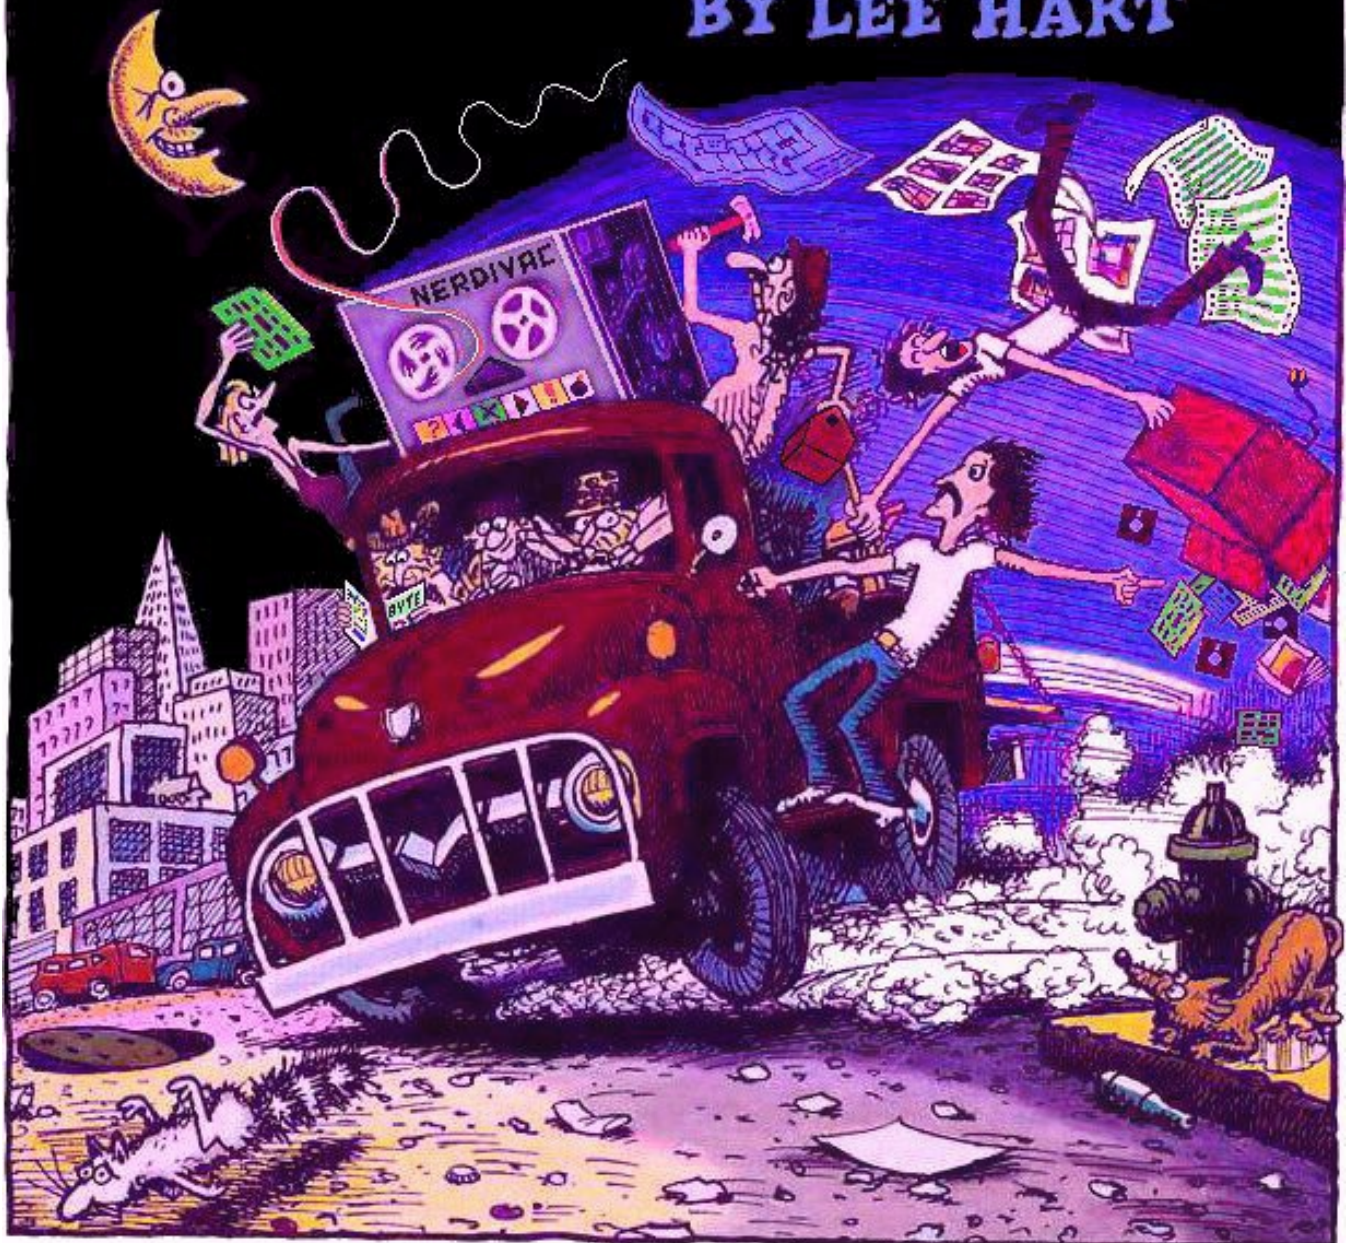

Inspired by the wonderfully original "Creative Computing" cover (c) 1979 by GILBERT SHELTON

Introduction

January 1975. My gawd; was it really 50 years ago that the microcomputer revolution began? It was the tipping point of momentous events. You could *see* the world changing right before your very eyes. America had just put men on the moon, and the Arab Oil Embargo had shown us that oil was not forever. And there on the cover of the January issue of Popular Electronics magazine was the MITS Altair 8800; a computer you could build yourself for only \$400.

I was just out of college with a fresh BSEE degree; idealistic, enthusiastic, and out to change the world. I went to work for Eastman Kodak in Rochester NY. They told me how wonderful the company was, that film was forever, and that they were the most advanced imaging company in the world.

But when I saw their old vacuum tube and relay circuits from the 50's, it reminded me of a story. Two shoe salesmen arrive in a remote village where everyone goes barefoot. The first salesman writes back, "Situation hopeless. They don't wear shoes". The second salesman writes, "Prospects unlimited. No one has shoes yet." I figured Kodak needed shoes; so I set out to make 'em.

By day, I worked inside the system, seeking to evolve the dinosaur from within. The other young EEs and I built digital cameras with a CCD imaging chip. We stored photo albums on audio cassette tapes, and displayed them on a TV set. We modified photocopiers to print text received from a serial port. We built systems to replace the messy chemical processing and costly silver with clean modern efficient electronics. That didn't work out so well. At every turn, management said the electronics weren't good enough and that film will always be better.

So by night, I built my own computers. And I conspired with other eager experimenters working at Kodak, 3M, Xerox, Rochester Institute of Technology, and the other high-tech outfits in the area. We *knew* the world was changing fast! Microcomputers were exactly the right tool to do it. And we were a part of it. We were inventing the future!

This is the true (*) story of the computer we made. Or could have made back then, if we'd been just a little smarter, or luckier, or worked a little harder, or had a little more nerve... or had found *you* to help!

But now *you* are part of the team. You've picked up the Project where we left off. Build it, test it, then invent your own incredible new gadgets. Show us what *could* have been done, if we'd only known then what we know now. C'mon – we're depending on you!

TMSI c/o Lee A. Hart
2521 19th St. N, St. Cloud MN 56303, USA
(320) 656-9574

leeahart@earthlink.net
<http://www.sunrise-ev.com/z80.htm>
Z80MC Group: <https://groups.io/g/Z80MC>

Rev.BD – 19 May 2025

--

* OK; so it's only partly true. Hey, I'm an old man now! My forgetory is better than my memory. I may have changed a few names, dates, details, facts, or even made some things up entirely. Sometimes the facts alone don't tell the whole truth, so a little artistic license is needed to communicate the *real* story.

Warning: May contain nuts.



END USER DISKETTE

Program CP/M
Version 1.4
Serial # CPM-000-02924

NOTICE OF LICENSE RESTRICTIONS

All software on this diskette is copyrighted and may be used and copied only under the terms of the Digital Research, Inc. End User License Agreement. This diskette is serialized and may be used only by the registered user, and may not be resold or transferred without the consent of Digital Research, Inc., P.O. Box 579, Pacific Grove, California. Disassembly of code is prohibited. Unauthorized reproduction, transfer, or use of this material may be a criminal offense under Federal and/or State law.

Program(s) Copyright © Digital Research, Inc.

1976-1980

A>stat b:*. * ; Table of Contents

Page	Bytes	Ext	Acc
2	188k	24	R/O B:COVER.JPG
3	8k	1	R/O B:INTRO.DOC
5	20k	2	R/O B:HISTORY.DOC
12	8k	1	R/O B:PARTLIST.VIS
14	24k	3	R/O B:ASSEMBLY.DOC
19	84k	11	R/O B:CIRCUIT.SCH
21	8k	1	R/O B:OPCODES.TXT
22	7K	1	R/O B:HOOKUP.DOC
25	11k	2	R/O B:SERIAL.TXT

Bytes remaining on B: 264k

A>_

Wiz,

Here's an 8" floppy disk with all the "Project Z" files. It holds up to 1.2 megabytes depending on formatting (single- or double-sided; single-, double-, or extended-density). That's a LOT for 8-bit software. Man, this is the high-tech way to do microcomputer software development in the 1970's!

Yeah, a hard disk would be nice; but then I couldn't send it to you. Besides, they are insanely expensive. Hobbyists or even small outfits like us can't afford them. Good thing we're not REALLY poor, or we'd be saving programs on cassette tapes!

It's a CP/M disk. CP/M is the most popular microcomputer disk operating system around. It's so popular that I hear IBM's PC-DOS is actually a copy of CP/M. If the disk is missing, or you can't read 8" disks, you can download the files from our BBS at <http://www.sunrise-ev.com/z80.htm>

Crash

HOW TO "READ" FM TUNER SPECIFICATIONS


Popular Electronics

WORLD'S LARGEST-SELLING ELECTRONICS MAGAZINE JANUARY 1975/75¢


PROJECT BREAKTHROUGH!

World's First Minicomputer Kit to Rival Commercial Models...

"ALTAIR 8800" **SAVE OVER \$1000**

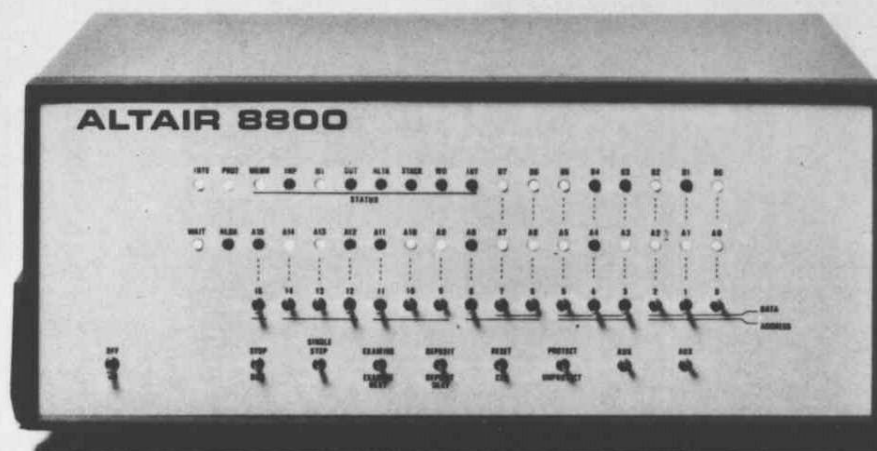

• An Under-^{Chip!}\$90

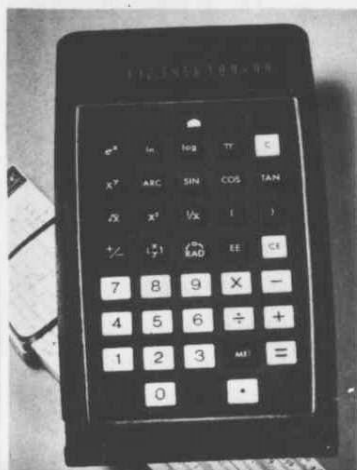

Advanced Abacus Associates

Subject: Altair 8800 !!!
To: Chip Hacker
From: Gil Bates

Did you see THIS? The kit is only \$400! Forget that MARK-8 from Radio Electronics. The 8008 is only half a CPU. This has an 8080. It's a REAL computer, man! This is going to be BIG! I hate my dead-end job (and so do you). So let's

1975 C38080 JMP FUTURE ; NOW!

Jan 11, 1975

Hi Gil,

Yeah, I saw it. Interesting! But is it real? They never show the insides; just a shot of the front panel boards. Seems like an awful lot of parts. 58 ICs... in a \$400 kit? Intel lists the 8080 for \$360, and the 8111 256x4 RAMs are \$26 apiece! Sounds too good to be true. But, I sent for ~~11/11/11/11~~ more information. Let's see what we get.

Before we board this Titanic, may I remind you that it was YOU who talked me into buying the [Mark-8](#) boards? I've got \$400 in it, and it will take another \$400 to get it to do anything more than blink LEDs. It's more like a bicycle with training wheels than a computer.

And before that, you got me to buy those calculator chips for \$300. Weren't we going to make a killing selling scientific calculators?

Yours truly, Chip

February 1, 1975

Chip,

HP was selling their HP35 scientific calculator for \$395 at the time. We bought 10 of those MOS Technology chips for \$30 each. And you did build a great desktop calculator with them! But it took a year to get it done. By that time, you could buy a Sinclair Scientific for \$100. We were right; but too slow!

Still, we did sell enough to brake even. And you got a great calculator out of it. You learned a lot~~x~~, and I'll bet you used it a million times, designing circuits and stuff. Money spent on brains and tools is well spent. Am I right?

Tell you what. I'll BUY the~~x~~ [Mark-8](#) from you for \$400. Use the money to by the Altair. The [Mark-8](#) will be collectible someday; so I'll probalby make a profit!

Your Fiend, Gil

Feb 20, 1975

Dear "Fiend",

You're right, of course. (Even a broken clock is right twice a day.) Against my better judgement you talked me into it. As discussed by phone, I'll pack up the [Mark-8](#) and send it to you. But before you put it in a glass case and sell it to some museum, PLEASE let me show you the neat things it can do!

I got the literature from MITS on the [Altair 8800](#). Their "System #1" is now \$542... and that's a minimum system, with only a front panel and 256 bytes of RAM (same as the [Mark-8](#)). It has an expansion bus that sounds great; but their accessory boards are expensive!

I thnk the way to go is buy their minimum system kit, and build my own memory an I/O boards. Theirs are WAY over-priced! (Like you said, they sell the razors cheap, and make up for it on the blades).

so I placed my order today!

Anxiously awaiting it,
Chip Hacker

JUNE 2, 1975

DEAR GIL,

SORRY FOR NOT WRITING. I'VE BEEN BUSY! IT TOOK MONTHS, BUT THE ALTAIR ARRIVED. THIS AIN'T NO HEATHKIT. IT TOOK A WEEK TO BUILD. POOR MANUAL, LOTS OF HAND WIRING (60 WIRES TO THE FRONT PANEL, 100 TO THE EXPANDER BOARD). AFTER FIXING MISTAKES AND REPLACING SOME BAD PARTS, I FLIPPED THE SWITCHES TO LOAD A PROGRAM AND IT WORKS! IF WE DO BUILD A PRODUCT, IT'S -GOT- TO HAVE A GOOD MANUAL AND BE SIMPLE TO BUILD.

I ALSO GOT A TERMINAL... A MODEL 19 ASR BAUDOT TELETYPE! UPPER CASE ONLY, BUT IT HAS A PAPER TAPE READER/PUNCH (THAT NEEDS FIXING). MY FIRST PROJECT WAS TO INTERFACE IT TO THE ALTAIR.

OK SO YOU WERE RIGHT AGAIN. THE ALTAIR -HAS- BECOME POPULAR, AND IS WAY BETTER THAN THE MARK-8. BUT PIECE BY PIECE, I THINK I'M GOING TO REBUILD EVERY PART OF IT. ITS BETTER BECAUSE I KEEP IMPROVING IT.

EVEN WITH THE MEMORY BOARD FILLED TO 1K, THERES NOT ENOUGH TO DO MUCH. I GOT MY BAUDOT PRINTER DRIVER WORKING, BUT WITH IT LOADED THERES NOT ENOUGH ROOM FOR EVEN A MACHINE-LEVEL MONITOR. I HAVE TO TOGGLE IN A LOADER, THEN IT CAN LOAD A PAPER TAPE WITH A PROGRAM. BUT THAT TAPE HAS TO INCLUDE A PUNCH PROGRAM IF I EXPECT TO SAVE ANYTHING TO LOAD LATER.

I GOT A PROTOBOARD AND WIRE-WRAPPED MY SERIAL INTERFACE. ITS JUST A PARALLEL PORT, TO BIT-BANG SERIAL DATA FOR THE TELETYPE. THERE WAS LOADS OF ROOM, SO I ADDED A 1702 EROM SOCKET. I PROGRAMMED IT AT WORK, SO NO MORE TOGGLING IN LOADERS AND HOPING THE PROGRAM WONT' CRASH, OR WORRYING THAT THE POWER FAILS AND I LOSE IT ALL.

I WAS GOING TO BUILD A MEMORY BOARD, BUT DIDN'T HAVE TO. I HEAR MITS BOARDS ARE TROUBLE, BUT THERE ARE ALREAADY LOTS OF OTHERS ON THE MARKET! MEMORY PRICES ARE DROPPING LIKE LEAVES IN FALL. FOR \$195 I GOT A 4K RAM BOARD FROM PROCESSOR TECHNOLOGY.

OF COURSE WITH ALL THIS, I HAD TO UPGRADE THE POWER SUPPLY. I'M ALSO OUT OF CARD SLOTS, AND WILL HAVE TO ADD ANOTHER EXPANDE RBOARD TO GO MUCH FURTHER. WANNA BUY AN ALTAIR FOR YOUR COLLECTION? THE IMSAI 8080, WITH ITS BIG MOTHERBOARD AND POWER SUPPLY IS LOOKING PRETTY GOOD RIGHT NOW.

CHIP

June 8, 1975

Hi Chip!

Good to hear from you, man. I thought you died! But I see you're in turtle mode again... your head down and puttering slowly and methodically away, while the world madly races ahead. You do absolutely brilliant work; but it takes you forever.

Have you found anything we can make for the Altair market (that someone ELSE isn't already doing)? Not memory boards, not BASIC... that's already been done! You want to sell me the Altair? Then make it DO SOMETHING that someone ELSE (other than you) would love! How about this... a memory board but with BASIC already in ROM, so it's there the instant you turn it on. The BASIC can be "FREE" (not \$150 like Altair BASIC) if it's on a \$150 memory board!

Impatiently yours,
Gil Bates

JUNE 22, 1975

HI GIL,

BASIC IN ROM WOULD BE SO COOL! I CAN BUILD THE BOARD BUT I'M NO PROGRAMMER. KNOW ANY GOOD ONES? THEY'RE STARTING A COMPUTER CLUB (R.A.M.S. FOR ROCHESTER AREA MICROCOMPUTER SOCIETY). I'LL START ASKING AROUND.

MEANWHILE, I CAN SEE THAT A ROM BOARD WOULD BE GREAT. IT WOULD SAVE HOURS OF LOADING WITH PAPER TAPE (AND MY PUNCH IS STILL GIVING ME TROUBLE). SO, I STARTED ON A ROM BOARD. ALTAIR BASIC IS 4K, SO WE'LL NEED 16 1702'S. MAN, THAT'S GOING TO BE EXPENSIVE.

CHIP

Aug 75

Hi Chip!

Summer is nuts here. The old farts go on vacation, so I'm WAY busy. (They all get 6 weeks; I only get a lousy 2, and have to take it when none of them want it).

Don't worry about prices. They will come down FAST! Have you heard of Moore's Law? Gordon Moore at Intel says they can put TWICE as many transistors on a chip every two years. That means chip prices will fall by 40% a year. Or more! That 8080 that was \$360 in Jan is already down to \$75! You watch: Those \$30 1702s will be \$10 by Christmas.

So work like hell on that ROM board! Even if we can't sell it, you'll have a replacement for that flakey old teletype.

o o
Gil Bates _/_/

OCT 7 1975

DEAR GIL,

GOT THE PARTS, AND WIRE-WRAPPED MY ROM BOARD. THE 1702 IS A MIGHTY ODD DUCK. READING IT IS BAD, BUT PROGRAMMING IT IS WORSE! AND THE BOARD HAS TO BE ABLE TO PROGRAM IT, OR THERE WON'T BE ANY WAY FOR A CUSTOMER TO GET HIS CODE INTO IT.

INTERFACING TO THE ALTAIR BUS IS A MESS. THEY JUST INVENTED IT AS THEY WENT, WITHOUT MUCH PLANNING. IT TOOK 12 ICS TO SUPPORT JUST 2 EPROMS. BUT IT WORKS! TODAY, I PROGRAMMED MY TELETYPE DRIVER INTO ONE AND AM USING IT NOW!

WENT TO THE RAMS MEETING. AMAZINGLY, THERE WAS ANOTHER ALTAIR! A PROF AT RIT DEMOED ONE HE BOUGHT FOR HIS LAB. HE GOT ALTAIR BASIC FOR IT, AND SAID HE'LL PUNCH A COPY OF THE TAPE FOR ME! BUT HIS TELETYPE IS ASCII AND MINE IS BAUDOT. NOT SURE HOW I'LL READ IT.

PS: YOU NEED A NAPOLEON HAT FOR YOUR TYPEWRITER ART SELF PORTRAIT.

CHIP

Oct 75

Hi Chip,

Great to hear it, man! I knew you could do it. The RIT connection sound great. Maybe he could be our first customer? See if he'd like a ROM board for his Altair. (Putting on my marketing hat).

Gil /_/_/
 o o
 //

NOV 11 1975

GIL,

THINGS ARE HAPENING! I WORK ALL DAY, THEN COME HOME AND COMPUTE TIL 2AM, THEN DO IT ALL AGAIN. "CRASH" APPLIES TO MORE THAN COMPUTERS.

THE PROF AT RIT HAS A GREAT SETUP. HE GOT EVERYTHING MITS HAD AVAILABLE (WHICH IS AOBUT HALF WHATS IN THEIR CATALOG). TOOK FOREVER TO ARRIVE (AND HE'S STILL WAITING FOR SOME STUFF).

I TOOK MY ALTAIR OVER THERE, AND SHOWED HIM MY ROM BOARD. HE LOVED IT! I OFFERED TO MAKE ONE FOR HIM, AND HE'LL PUT BASIC IN THE ROMS AND GIVE A SET TO ME.

YEAH YEAH, I CAN HEAR YOU NOW. "YOU GAVE IT AWAY FOR FREE? IDIOT!" BUT THINK... THERE'S NO WAY 2 GUYS IN A GARAGE CAN GET A PURCHASE ORDER FROM THE U. BESIDES, THEY TAKE MONTHS TO PAY. BUT HE IS GIVING ME BASIC, AND THE ROMS! THATS OVER \$200 WORTH OF IC'S ALONE!

CHIP(PING AWAY AT IT)

Dec 2, 1975

Chip,

That's fantastic! No, I think you're using your head. You're actually DELIVERING something, AND to an important client that can do lots of good things for us.

Pogo: "Brains is better'n money, 'cause brains'll GIT you money."

Albert: "Yeah? Who's buyin? I got brains I never use!"

On purchase orders: We ARE going to have to set up a company to look professional. I'll get working on it!

Gil /|
 | :::::|| (look, it's an Altair!)
 |. :::::|/

PS: SD Sales has 1702's for \$6.95 in the Jan 1976 BYTE. See? Moore's Law rules!

JAN 16, 1976

MERRY CHRISTMAS, AND HAPPY NEW YEAR!

MY PRESENT WAS THAT I GOT MY NEW ROM BOARD WORKING. MANY IMPROVEMENTS OVER THE 1ST ONE. I LUGGED MY SYSTEM OVER TO RIT LAST NIGHT, AND WE WORKED ON IT TIL 1AM. I WROTE A UTILITY TO TRANSFER BASIC BY LOADING THE ASCII TAPE WITH HIS TELETYPE, AND SAVING IT AS BAUDOT TO MY PUNCH. IT DIDN'T WORK...

BUT THE NEW ROM BOARD DID WORK! SO WE LOADED BASIC IN HIS ALTAIR, THEN TOGGLED IN MY BURNER CODE, AND PROGRAMMED A SET OF EPROMS FOR HIM. BUT IT WOULDN'T RUN FROM ROM FOR SOME REASON. HE HAD A HOT STUDENT THERE, WHO WAS STILL HACKING ON IT WHEN I HAD TO LEAVE.

SO TODAY HE CALLED. IT WORKS! HE JUST HAD TO PATCH THE I/O AND RAM STARTING ADDRESSES. AND, HE BURNED A SET OF ROMS FOR ME. I PICKED 'EM UP AFTER WORK, AND COULDN'T WAIT TO INSTALL THEM. IT TOOK ME A WHILE TO MODIFY MY BAUDOT DRIVER TO WORK WITH IT... BUT THEN BASIC CAME UP!

THE ONLY PROBLEM (AFTER A QUICK TEST) IS THAT BAUDOT IS MISSING MANY PUNCTUATION CHARACTERS THAT BASIC USES. NOT SURE HOW I'LL DEAL WITH THAT. BUT I JUST HAD TO WRITE AND TELL YOU THE NEWS!

CHIP

Jan 26, 1976

Hi Chip,

I had a GREAT time at your place last weekend! Thanks so much for putting up with me. It's INCREDIBLE that you built a computer more powerful than Apollo's AGC-1 that flew men to the moon! The contrast between it and your clattering old WW2 veeblefetzer of a printer is particularly striking.

I apologize again for monopolizing your computer all day... and all night... and most of the next day. I almost got my stock-picker program working, but ran out of memory. It's just so friggin' AMAZING to have a machine that you can actually program to do what you want RIGHT NOW, without having to wait in line or submit your deck to be run overnight. The possibilities are ENDLESS! Have you read Ted Nelson's "Computer Lib / Dream Machines" yet? We are living in the future RIGHT NOW!

Can we commercialize your ROM board? Please? NOW? People are DYING to get computers that work as well as yours (me included). This is an expensive hobby; to go anyplace, we need to find SOME way to pay for it.

I got a name for our company. How about Itty Bitty Micro Company? That pretty much describes us. And the initials are "IBM".

o o
Gil ___/

19 MARCH 1976

HI GIL,

MY ROM BOARD IS JUST A DEVELOPMENT TOOL... A TOOL YOU HAVE TO MAKE FIRST, TO BUILD THE THINGS YOU REALLY NEED. LOTSA PROBLEMS SELLING IT:

1. 1702'S ARE TOO SMALL; TAKES TOO MANY. THERE'S A NEW 2708 CHIP THATS BETTER. 4 TIMES BIGGER, MUCH EASIER TO USE. AND IT HAS SPARE PINS, SO EVEN BETTER VERSIONS ARE COMING (THAT MOORE'S LAW THING).

2. IT COSTS LIKE \$1000 TO GET A PCB LAID OUT AND BUILT. WE DON'T HAVE THAT KIND OF MONEY! CAN WE FIND SOMEONE WHOSE GOOD AT IT THAT MIGHT WORK IN TRADE FOR A COMPUTER?

3. WE CAN'T SELL ALTAIR'S BASIC. (DID YOU SEE BILL GATES OPEN LETTER? PIRACY, LAWYERS, JAIL!) WE HAVE TO FIND ONE OF OUR OWN. BUT GUYS ARE WORKING ON A PUBLIC-DOMAIN BASIC. PEOPLE'S COMPUTER COMPANY IS WORKING ON EXACTLY THAT!

4. YOU'RE RIGHT... THINGS ARE MOVING FAST! BY THE TIME WE SOLVE THESE ISSUES, A DOZEN OTHER GUYS WILL ALREADY BE SELLING ROM BOARDS. WE HAVE TO THINK AHEAD, AND FIGURE OUT WHAT WILL HAPPEN NEXT, AND THEN BUILD THAT.

I THINK WE NEED TO WALK BEFORE WE RUN. KEEP LEARNING, AND BUILDING TOOLS. YES, WE NEED MORE MEMORY. BUT LET OTHER PEOPLE BUILD ROM AND RAM BOARDS FOR US. THAT'S WHAT EVERYONE ELSE IS ALREADY MAKING.

RICHIE KERNIGAN (THE RIT GUY THAT GOT MY BASIC WORKING) IS A SOFTWARE GENIUS. HE MEMORIZED THE OPCODES AND ASSEMBLES CODE IN HIS HEAD! I'M BUILDING A COMPUTER FOR HIM, AND HE'S WRITING THE CODE FOR ME.

WE'RE WORKING ON SOMETHING YOU'LL LIKE. IT'S LIKE DON LANCASTER'S "TV TYPEWRITER", BUT IT WILL DISPLAY A SECTION OF THE COMPUTER'S MEMORY ON A TV SCREEN. WAY FASTER, CHEAPER, AND SIMPLER! WE THINK SOME KIND OF COMBINED COMPUTER AND TV TYPEWRITER IS THE WAY TO GO!

CHIP

(That's enough history. Let's jump ahead to the Important Stuff!)

SUBJECT: Parts List
 DATE: 23 January 1980
 FROM: chip8080 [71323,0142]
 TO: wizwireman [72404,1991]

Wiz,

Gil says to send you a set of boards and parts. OK, I mailed it out today... hopefully to the right address! Knowing you, if it arrives by noon it will be built by midnite. I swear, you wire things faster than I can draw the schematics.

Two boards; so two bags of parts, and two Visicalc parts lists. Keep them separate, as each board has the same designators (C1, R1, U1, etc.) for DIFFERENT parts. Don't mix 'em up, or debugging will be "entertaining"!

"Source" shows replacement parts; but I sent what I had on hand. That means some parts are different from the "source" numbers. No worries, mate! We built some with these parts, and they WORK! Check the resistors with an ohmmeter if you're not sure it's the right value. Here are the substitutions I can think of right now.

CPU board (rev.B) now has **TWO** ways to power it. The instructions describe way #1.

1. Power from P1 on Front Panel. Install 5v regulator U8 with its metal tab **UP** (away from PCB). I supplied a low-dropout version (better than a 7805).
2. Power from P4 on the CPU board: Use this to run the CPU board by itself, with no other boards. Do not install 5v regulator U8; install P4 in its place. Short U8 pins 1-3 (the outer pins). Short P3 pins 1-2 (next to P4).


Front Panel (rev.D): I sent three 10-pin sockets for J1-J3. Cut one to make a 4-pin and two 2-pin sockets. The 2-pin pieces are "feet" to support the corners. I changed U5 from an LED-photoresistor to an LED-phototransistor optocoupler. Y2 is a 1" diameter brass disk, with a wire soldered to it.

I included a Jameco ad, with pictures and notes to identify the parts. Also prices; but it's from an old issue of "Byte" magazine so they have changed a bit. Between the ad and parts list, you'll figure it out. Yell if you have questions!

--

Chip Hacker	"There ain't no rules around here.
Chief (and only) engineer	We're trying to accomplish something!"
Itty Bitty Micro Company	Thomas A. Edison

0 SUBJECT: Re: Parts for Project Z
 0 DATE: 27 January 1980
 0 FROM: wizwireman [72404,1991]
 0 TO: chip8080 [71323,0142]
 0
 0 Got yer email, Chip. Will let you
 0 know when the package arrives.
 0
 0 Any assembly instructions? You want
 0 it done fast, or cheap, or right?
 0 Pick one. If "cheap", I've got just
 0 the kid to do it!
 0 --
 0 Willard Wireman
 0 Senior Technician
 0 Eastern Coat Rack Company
 0 "A future to hang your hat on"

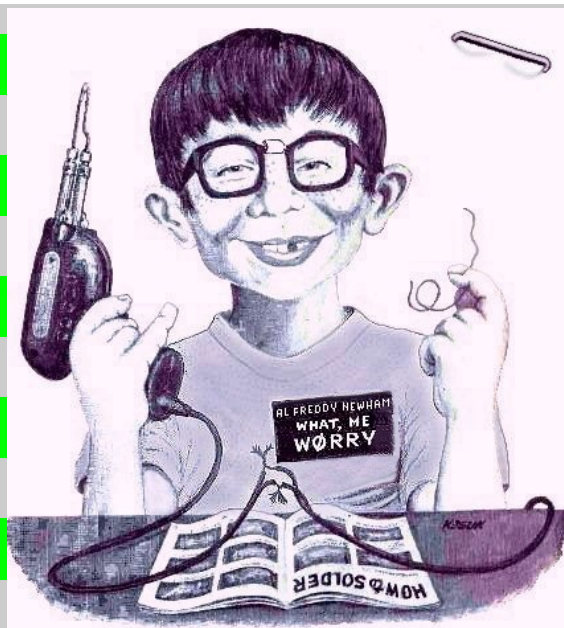

Z80 MEMBERSHIP CARD -- PARTS LIST				
	A	B	C	D
1	QTY	ITEM	DESCRIPTION	SOURCE
2	---	----	-----	-----
3	1	C1	capacitor 4.7uF 10vdc tantalum	D 478-8841-ND
4	1	C2	capacitor 33uF 10vdc electrolytic	D 493-1730-ND
5	3	C3-5	capacitor 0.1uF 50v X7R ceramic 0.1"LS	D BC3324-ND
6	1	C6	capacitor 0.1uF X7R ceramic 0.2"LS	J 544921
7	2	P1,2	header 30-pin 0.025"sq pins 0.1"LS	J 103342
8	2	R1,2	resistor 1 meg 5% 1/4w carbon film	J 691585
9	1	R3	resistor 2.2K x 5 10-pin SIP isolated	D 4610X-2-222LF-ND
10	1	R4	resistor 2.2K x 7 8-pin SIP bussed	D 4608X-1-222LF-ND
11	1	R5	resistor 2.2K x 3 6-pin SIP isolated	D 4606X-2-222LF-ND
12	1	U1	Z80A CPU NMOS (or Z84C00 CMOS)	J 35596
13	1	U1s	socket 40-pin IC low height	D ED5640-ND
14	1	U2	32K x 8 RAM (62256,43256,58257,60256 etc.)	J 42850
15	1	U3	32K x 8 EPROM (programmed with ZMCv15)	J 39731
16	2	U2s,U3s	socket 28-pin IC low height	D ED5628-ND
17	1	U4	74HC368 hex tri-state inverter	D 296-33074-5-ND
18	1	U5	74HC138 3-to-8 decoder	J 45330
19	1	U6	74HC273 octal D flip-flop	J 45743
20	1	U7	74HC245 octal transceiver	J 45671
21	1	U8	LM2940T, LF50CV, or LM7805CT 5v regulator	J 107182
22	1	Y1	resonator 4 MHz with capacitors	D 490-1208-ND
23	1	PCB	Z80 Membership Card PC board, rev.B	TMSI (that's me!)
24	1	CASE	Altoids candy tin	candy store

Z80 MEMBERSHIP CARD FRONT PANEL -- PARTS LIST				
	A	B	C	D
1	QTY	ITEM	DESCRIPTION	SOURCE
2	---	----	-----	-----
3	1	C1	capacitor 4.7uF 10vdc tantalum	D 478-8841-ND
4	1	C2	capacitor 4.7uF 25v X5R ceramic	D 445-173255-1-ND
5	3	C3-5	capacitor 0.1uF 50v X7R ceramic 0.1"LS	D BC3324-ND
6	1	D1	LED display 7seg 7digit Rohm LS-2074M2G	TMSI (still me)
7	2	D2,D3	1N4148 100v 0.3a diode small signal	J 179215
8	3	J2a,b,c	socket 10-pin Molex 22-18-2101	D WM3241-ND
9	*	J1,3	socket 2-pin (* cut from the end of J2c)	
10	1	P1	header 6-pin 0.025"sq pins 0.1"LS	J 153700
11	3	Q1,2,3	NPN transistor with 47K/47K FJN3304R	TMSI (that's me)
12	2	Q4,5	PNP transistor with 22K/22K FJN4303R	TMSI (me again)
13	1	R1	resistor 1.5K x 4 5-pin SIP bussed	D 4605X-101-152LF
14	2	R2,4	resistor 18K x 4 5-pin SIP bussed	D 4605X-101-183LF
15	1	R3	resistor 3.3K 5% 1/4w carbon film	J 690988
16	1	R5	resistor 100 x 3 6-pin SIP isolated	D 4606X-102-101LF
17	1	R6	resistor 100 x 4 8-pin SIP isolated	D 987-1253-ND
18	16	S0-F	pushbutton switch, tactile	D EG1832-ND
19	1	U1	74HC4040 12-bit binary counter	J 45920
20	1	U2	74HC393 dual 4-bit binary counter	J 251504
21	1	U3	74LS145 BCD-to-decimal decoder/driver	D 296-1641-5-ND
22	1	U4	74HC05 hex inverter, open collector	J 88081
23	1	U5	LED-transistor optocoupler, FOD817C	D FOD817C-ND
24	1	Y2	piezo speaker 2KHz PUI Audio AB2720B	D 668-1405-ND
25	1	PCB	Z80 Membership Card Front Panel, rev.D	TMSI (still me)

Sources: A=arrow.com D=digikey.com E=goldmine-elec.com J=jameco.com

Boards, parts, and complete kits available from TMSI c/o Lee Hart at <www.sunrise-ev.com/z80.htm>.

74LS

notch or dot end is Pin 1 →

74LS00	.39	74LS73	.65	74LS161	2.25
74LS01	.39	74LS74	.65	74LS163	2.25
74LS02	.39	74LS75	.79	74LS164	2.25
74LS03	.39	74LS76	.65	74LS181	3.69
74LS04	.45	74LS86	.65	74LS190	2.85
74LS05	.45	74LS90	1.25	74LS191	2.85
74LS08	.39	74LS92	1.25	74LS192	2.85
74LS10	.39	74LS93	1.25	74LS193	2.85
74LS13	.79	74LS107	.65	74LS240	2.19
74LS14	2.19	74LS112	.65	74LS245	2.25
74LS20	.39	74LS132	1.55	74LS257	1.89
74LS26	.49	74LS136	.65	74LS273	1.89
74LS27	.45	74LS138	1.89	74LS368	.99
74LS30	.39	74LS145	1.55	74LS373	2.85
74LS32	.45	74LS151	1.89	74LS393	2.79
74LS40	.49	74LS157	1.55	74LS670	3.95
74LS51	.39				
74LS55	.39				

MANY OTHERS AVAILABLE ON REQUEST
20% Discount for 100 Combined 7400's

CMOS

CD4000	.25	CD4035	1.85	74C04N	.75
CD4001	.25	CD4040	2.45	74C10N	.65
CD4002	.25	CD4042	1.90	74C20N	.65
CD4006	2.50	CD4044	1.50	74C30N	.65
CD4007	.25	CD4046	2.51	74C42N	2.15
CD4009	.59	CD4047	2.75	74C73N	1.50
CD4010	.59	CD4049	.79	74C74	1.15
CD4011	.25	CD4050	.79	74C90N	3.00
CD4012	.25	CD4051	2.95	74C95N	2.00
CD4013	.47	CD4053	2.95	74C107N	1.25
CD4016	.56	CD4060	3.25	74C151	2.90
CD4017	1.35	CD4066	1.75	74C154	4.00
CD4019	.55	CD4069	.45	74C157	2.15
CD4020	1.49	CD4071	.45	74C160	3.25
CD4022	1.25	CD4071	.45	74C161	3.25
CD4023	.25	CD4511	2.50	74C163	3.00
CD4024	1.50	CD4518	2.60	74C164	3.25
CD4025	.25	74C00N	.39	74C173	2.60
CD4027	.69	74C02N	.55	74C193	2.75
CD4028	1.65			74C195	2.75
CD4029	2.90			MC4044*	4.50
CD4030	.65			MC14016*	.56

LINEAR

LM309K	.99	LM709N	.29
LM324N	1.80	LM710N	.79
LM339N	1.25	LM711N	.39
LM340T-5	1.75	LM723N	.55
LM340T-5	1.75	NE555N*	.45
LM340T-6	1.75	NE556N*	.75
LM340T-6	1.75	NE561B*	5.00
LM340T-12	1.75	NE562B*	5.00
LM340T-15	1.75	NE566CN*	1.25
LM340T-24	1.75	NE567H*	1.95
		LM7805T	1.75
		LM78L05	.99

TRANSISTORS

2N2222A	5/\$1.00	2N4123	10/\$1.00	2N5088	4/\$1.00
2N2907A	5/\$1.00	2N4400	4/\$1.00	2N5089	4/\$1.00
2N3053	5/\$1.00	2N4401	4/\$1.00	2N5129	5/\$1.00
2N3055	5/\$1.00	2N4402	4/\$1.00	2N5138	5/\$1.00
MJE2955	\$1.00	2N4403	4/\$1.00	2N5139	5/\$1.00
MJE2955	\$1.25	2N4409	5/\$1.00	2N5209	5/\$1.00
2N3904	4/\$1.00	2N5086	4/\$1.00	2N5951	5/\$1.00
2N3905	4/\$1.00			C106B1SCR	2/\$1.00
2N3906	4/\$1.00			2N5432	\$2.00

DIODES

TYPE	VOLTS	AMPS	PRICE	TYPE	VOLTS	W	PRICE
1N4001	50 PIV	1 AMP	12/1.00	1N4734	5.6	1w	.28
1N4002	100 PIV	1 AMP	12/1.00	1N4736	6.8	1w	.28
1N4003	200 PIV	1 AMP	12/1.00	1N4738	8.2	1w	.28
1N4004	400 PIV	1 AMP	12/1.00	1N4742	12	1w	.28
1N4005*	600 PIV	1 AMP	10/1.00	1N4744	15	1w	.28
1N4006*	800 PIV	1 AMP	10/1.00	1N5232	5.6	500mw	.28
1N4007*	1000 PIV	1 AMP	10/1.00	1N5235	6.8	500mw	.28
1N4148	75	10mA	15/1.00	1N5236	7.5	500mw	.28

CAPACITOR

C3-6

50 VOLT CERAMIC DISC CAPACITORS

1-9	10-49	50-100	1-9	10-49	50-100		
10 pf	.05	.04	.03	.001μF	.05	.04	.035
22 pf	.05	.04	.03	.0047μF	.05	.04	.035
47 pf	.05	.04	.03	.01μF	.05	.04	.035
100 pf	.05	.04	.03	.022μF	.06	.05	.04
220 pf	.05	.04	.03	.047μF	.06	.05	.04
470 pf	.05	.04	.035	.1μF	.12	.09	.075

CORNER

CORNER

+20% DIPPED (SOLID) TANTALUM CAPACITORS

1.0/35V	.28	.23	.17	4.7/25V	.32	.28	.23
3.3/25V	.31	.27	.22	10/25V	.40	.35	.29

ALUMINUM ELECTROLYTIC CAPACITORS

Axial Lead	Radial Lead
3.3/50V .15	.13
10/50V .16	.14
22/25V .17	.15
47/25V .19	.17
100/25V .24	.20
220/25V .32	.28
470/25V .33	.29
1000/16V .55	.50
2200/16V .70	.62

CONSUMER ELECTRONICS

PONG SUPER PONG

SINGLE GAME \$59.95
4 GAMES IN ONE \$89.95

PONG

FOR YOUR HOME TV


GAMES INCLUDED IN SUPER PONG ARE:

- PONG
- CATCH
- SUPER PONG
- HANDBALL

FEATURES OF PONG AND SUPER PONG


- Incremental speed on volleys increases excitement.
- Playing field adjusts to any size screen.
- Game appears in color or in black & white, depending on television set.
- Unmistakable "PONG" sound accompanies each volley.
- Digital scoring flashes on the screen between each point.
- 2 player challenge or Solitaire
- Hooks up simply to any model television set; the screen actually becomes the playing field.
- English and other techniques can be used to make any member of the family a Pong champion.
- Battery operated by 4 size "D" flashlight batteries included with the Unit.

AC Adaptor (Eliminates Batteries) \$9.95













.200" dia.
XC556Red 10/\$1
XC556Green 7/\$1
XC556Yellow 7/\$1
XC556Orange 7/\$1
XC556Clear 7/\$1

SUPER SAVINGS! DISCRETE LED DISPLAY LEDS



.125" dia.
XC209Red 10/\$1
XC209Green 4/\$1
XC209Yellow 7/\$1
XC209Orange 4/\$1

D1 sorta like this but 7 digits



SUBJECT: Assembly Notes
DATE: 27 Jan 1980
FROM: chip8080 [71323,0142]
TO: wizwireman [72404,1991]

Hah. Be nice, or I'll tell Gil what you're REALLY doing on vacation!

No, I don't have a proper "Heathkit" assembly manual yet. The boards we built here are kind of learn-as-we-go things, so I could check out the hardware, and Crash could debug the software. We still need to work out the best way to assemble it.

Tracey did a fantastic job on the layout! You got a rev.B CPU and rev.D Front Panel card. Be glad you didn't get the rev.A cards. Here are some "goodies" and "gotchas" that may help during assembly:

Thinking "Inside the Box":

1. If you want a two-board stack to fit in an Altoids tin with the LID CLOSED, it takes some extra effort to get the boards very close together:
 - a. Cut the leads on the back sides of the boards VERY SHORT. Otherwise, they will short to the metal Altoids case or between boards.
 - b. Normal IC sockets are too tall. I sent ultra-low-profile sockets for the Z80 and memory chips. To socket everything, get more at digikey.com (ED53##-ND, where ## is the number of pins), or use socket pins (digikey.com ED5037-ND).
 - c. REMOVE the plastic body of the 30-pin headers to get the cards closer together. There are instructions for how to do this on page 15.
2. If you DON'T CARE about putting it in an Altoids tin, or are willing to remove the top cover of it, assembly is much easier. Just solder the headers on top of the CPU board as usual. The boards wind up spaced 0.1" farther apart. That gives you enough room to use ordinary IC sockets, too.

Male? Female? Keying?

I put male pins on TOP of the CPU board, and female sockets on the BOTTOM of the Front Panel board. It's easier to get female connectors that accept individual wires, or ones that mount on other boards (like the Front Panel). Additional boards have female sockets on the bottom and male pins on top, so they all stack together.

But beware; there is no keying! I put a wide stripe on the "P2" edge of each card, and a notch at one end as a visual cue. Or, you could put sockets on the top, and pins on the bottom at one or more locations (such as the center 10 pins of P1) to prevent plugging the cards in backwards. If you have any better ideas, let me know.

Stand-alone Operation

The instructions describe the "standard" setup with a Front Panel card. Install regulator U8, and the 2-card stack can be powered from P4 on the Front Panel. You can use any power supply or batteries from 5-9 volts DC at about 150mA.

Optionally, you can use the CPU card all by itself, as a single-board computer. For this, do not install U8. Instead...

1. Short U8 pin 1 to pin 3 (the outer two pins).
2. Short P3 (right next to P4) to connect /INT to IN7 (the serial input).
3. Install a 6-pin header at P4 (with pin 2 removed as a key).

Power it with a regulated supply of +5v at about 25mA. P4 has the same pinouts as P1 on the Front Panel, so the same Sparkfun.com FTDI 5v USB-serial cable #9718 works for both. You can still use it with the Front Panel, too.

-- Chip

Z80 Membership Card - Assembly Details

Here's a Polaroid of the board, with comments on assembling it. All parts go on top, and are soldered on the bottom. Cut off the excess lead length on the bottom as short as possible, so they won't short to the Altoids case! When you finish installing each part, circle the designator (U7, C6 etc.) so you know it is done.

Watch out for the polarity of the ICs, C1, C2, and the SIP resistors. The part numbers printed on the ICs should be right side up in this view.

U7 74HC245. Pin 1 goes on the left. The end with the notch or dot marks pin 1 --> ///////////////

R5 2.2K 6-pin SIP. Yellow, marked 6X-2-222LF pin 1 left-> |||||

Note: C1 and C2 +/- point in opposite directions!

C5 0.1uF yellow, marked 104

C1 4.7uF yellow, + in top hole (toward P2)

C2 33uF black, + in top hole (toward P2)

C6 0.1uF yellow, marked 104, and 0.2" wide

U6 74HC273. Pin 1 on left end.

U4 74HC368. Pin 1 on left end.

Y1 4MHz resonator blue, 3 pins |||

R1 1meg -- brn-blk-grn-gold

U1 Z80. Solder socket 1st, then plug in Z80. The socket is TIGHT, so push hard!

C3 0.1uF yellow marked 104

R2 1meg -- brn-blk-grn-gold

C4 0.1uF yellow, marked 104

R4 2.2k 8-pin SIP red, pin 1 --> ||||| marked L81S222. Pin 1 at left end.

R3 2.2k 10-pin SIP red, pin 1 --> ||||| marked L103S222 Pin 1 at left end.

U5 74HC138 Pin 1 at left end

P2 30-pin header Install it as described for P1 (below).

U8 LM2940T, LF50CV Face metal side UP (AWAY from card). See p.14 for standalone operation.

U3 socket first, then EPROM IC. Pin 1 on left. Push hard!

U2 socket first, then RAM IC. Pin 1 on left. Push hard!

P1 30-pin header:
1. Push pins into body like this. -->
2. Put on board with body on bottom so pin is 1/4" (<1/4") (6.35mm) high.
3. Solder on top.
4. Cut off body and excess pin length on the bottom. (<1/4")

Hint for P1 and P2: If your solder joints look "ugly", push one of the mating female connectors for J1 (in the bag of parts for the Front Panel) on the TOP of the pins to hold them in place. Then re-solder the pins again from the BOTTOM side to make the joints look "pretty". Remove the female connectors when done.

Z80 Front Panel Card - Assembly Details

Here's a Polaroid of the Front Panel board, with a few more "hints and kinks". All parts go on top, EXCEPT the female sockets at J1, J2, and J3. As usual, watch out for +/- polarity and pin 1's. Circle the designators as you install each part.

Serial I/O: There are **TWO** ways to assemble it. Do **ONE** of the following (a or b):

- Real RS-232 serial I/O, with idle = -5v to -12v, active = +5v to +12v:
Install Q1, Q4, D2, R3, and C2.
- TTL serial I/O, with idle = +3v to +5v, active = 0v (i.e. USB-serial adapters):
Install scrap pieces of wire as **shorting jumpers** in place of Q1 and Q4.

Transistors Q1-Q5:

Install P1, D1, and switches **FIRST**. Then install transistors with flat side as shown on the board. Get them as close to the board as possible (no higher than the switches, P1 or D1).



C5 0.1uF marked 104

C1 4.7uF yellow, -
+ wire in hole toward S1.
Lay it **FLAT**.

C3 0.1uF marked 104

U1 74HC4040
pin 1 on left

U2 74HC393
pin 1 on left

P1 6-pin header
Remove pin 2

Q1: Serial input:

- For RS-232:
Q1 = **FJN3304**.
marked R3304
- TTL: no Q1;
install jumper
() wire
\ / at Q1.

Q4: Serial output:

- For RS-232:
Q4 = **FJN4303**.
marked R4303
- TTL: no Q4;
install jumper
() wire
\ / at Q4.

Q3 **FJN3304**.
marked R3304

C4 0.1uF marked 104

S0-SF Pushbutton
16 switches
in 16 places

R1 1.5K 5-pin SIP
yellow,
marked
5X-1-152LF

Q2 **FJN3304**.
marked R3304

Q5 **FJN4303**.
marked R4303

U3 74LS145
pin 1 left

R4 18K 5-pin SIP
red,
marked
L51S183

U5 Optocoupler
marked 817C,
dot for pin 1 in
lower right corner.

R2 18K 5-pin SIP
red,
marked
L51S183
Pin 1 on left.

U4 74HC05
pin 1 left

D1 LED display. Trim its
"toenails" (a little foot at
each end) so it sits level.

D3 1N4148 diode.
Band end left

D2 1N4148 diode.
Band end up


- RS-232: add D2
- TTL: no D2

R3 3.3K---
org-org-red-gold
a. RS-232: add R3
b. TTL: no R3

C2 4.7uF
blue, marked 475
a. RS-232: add C2
b. TTL: no C2

R5 100 6-pin SIP
red,
marked
L63S101.
Pin 1 bottom.


R6 100 8-pin SIP
red,
marked
L83S101.
Pin 1 on left.

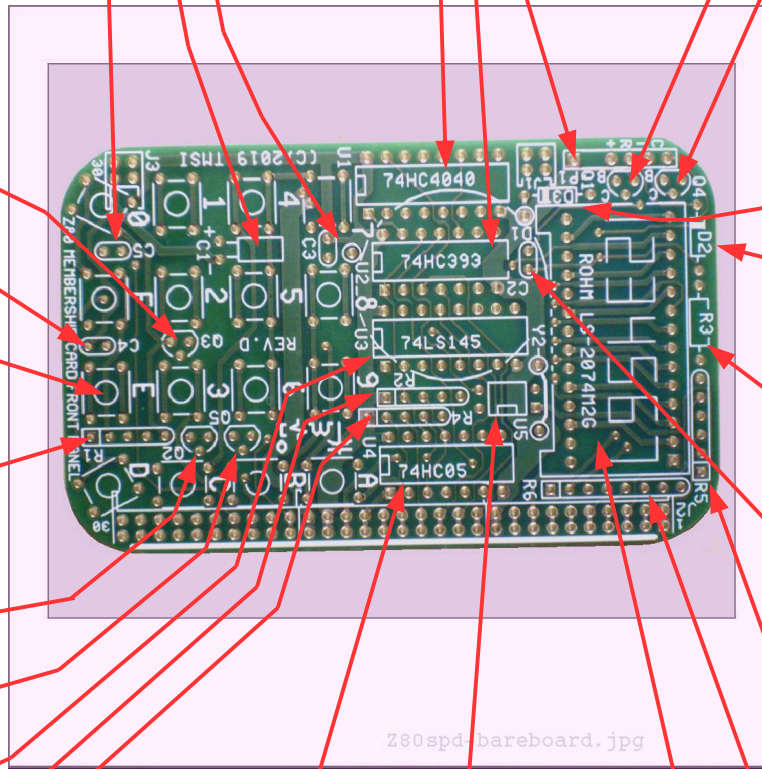

Z80 Front Panel Card - Assembly Details (continued)

Y2 Piezoelectric Speaker -- This is a metal disk about 1" in diameter. It sits on top of U2 and U3, so install it after all the other parts are on the board.


1. Solder a 1/2" (12mm) piece of scrap wire in each of the 3 circled holes that outline the disk.
2. Lay a strip of paper between the wires to space the disk up so it won't touch U2-U3. (If it touches, it dampens the sound.)
3. Lay the disk on top, silver side up, between the 3 wires.
4. Bend the 3 wires to touch the edges of the disk, and solder them to the edges. Cut off any excess wire length.
5. Remove the paper. It should slide out easily, to leave a small air space between the disk and U2-U3.
6. Finally, solder the last wire from the top of the disk into the hole above the "U5" label. (Note: This is an old photo; it had "Y2" where the current rev.D card has "U5".)

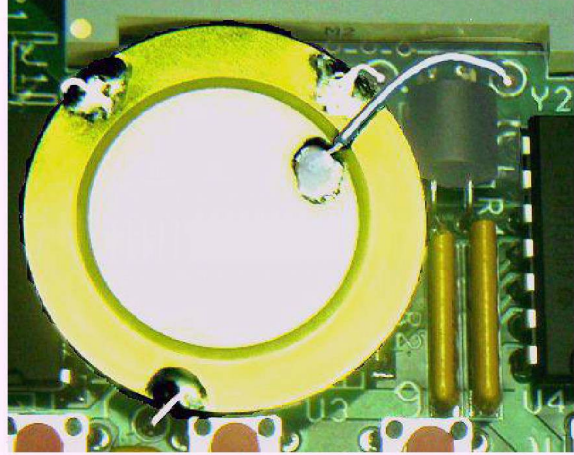

Piezo Speaker Y2 on Front Panel

J1, J2, and J3 -- We actually need one 24-pin socket (J2), and two 2-pin sockets (J1 and J3). All I could get were 10-pin parts. You need to cut one of the 10-pin connectors to make a 4-pin, and two 2-pin connectors. Use the 4-pin piece and two of the 10-pin parts to make the 24-pin socket. Here's how to cut it:

1. Lay the socket on the table with the pins pointing away from you, and the two "ears" at the ends pointing up. There is a tiny "1" at the right end, and a tiny "10" at the left end. These are the pin numbers.

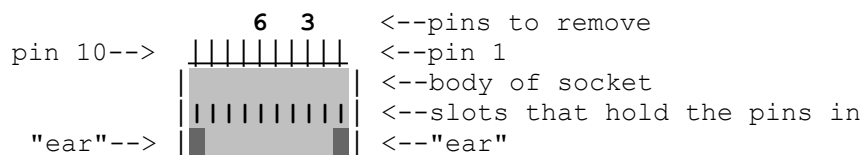


2. Use a small screwdriver to push down the tab inside the slots of pins 3 and 6. Now pull pins 3 and 6 out of the body.
3. Using a sharp knife or hacksaw, CUT the socket in the middle of pin positions 3 and 6. This gives you a 4-pin, and two 2-pin sockets with ragged cut ends.
4. Trim and smooth the cut ends to satisfy your artistic sense. (They won't get in the way; they just look ugly.) You can use a knife, sandpaper, file, etc.
5. Cut off the "ears". (They get in the way of other parts.)

Install these female sockets on the **BOTTOM** (soldered side) of the board. There are pairs of holes for each one. Solder the pins of the socket into the **INNER** row of holes that are **AWAY** from the edge of the board.


Like this...

edge of PC board

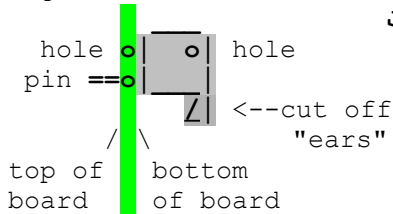


J1 2-pin socket: Install it on the BOTTOM, solder it on top.
J3 2-pin socket: Install it the same as J1. (J1 and J3 are just used as spacers to hold the two boards apart).
J2 24-pin socket: Install a 10-pin socket at pins 1-10 (in the lower right corner of the photo on page 16). Install a 2nd 10-pin socket next to it at pins 11-20. Install the 4-pin socket piece next at pins 21-24.

Plug the cards together as shown below (P1 to J1, P2 to J2). P2 and J2 have a WIDE STRIPE on both cards. Be sure no exposed Z80 card pins short to P1 on the bottom of the Front Panel! Slide a piece of paper between the two cards to be sure nothing touches.

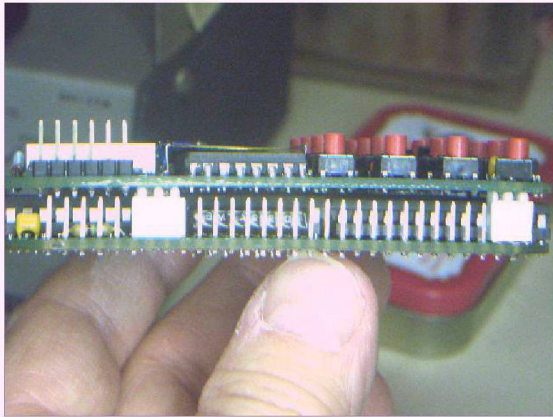


P1-J1 side, cards plugged together.
No plastic body on CPU card pins.
2-pin sockets on Front Panel bottom.

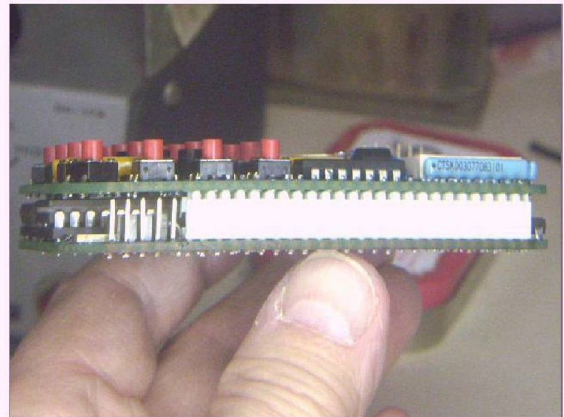

P2-J2 side, cards plugged together.
Sockets on bottom of Front Panel.
No sockets on left six pins.

That's it -- You're done! To see if it works, read the "Crash Course in Computing" for quick-start operating instructions. For details on using the CPU card by itself (stand-alone operation) or with the Z80-SIO card, download the complete "Operating Manual" at <http://www.sunrise-ev.com/photos/z80/Z80MC-2017.pdf>

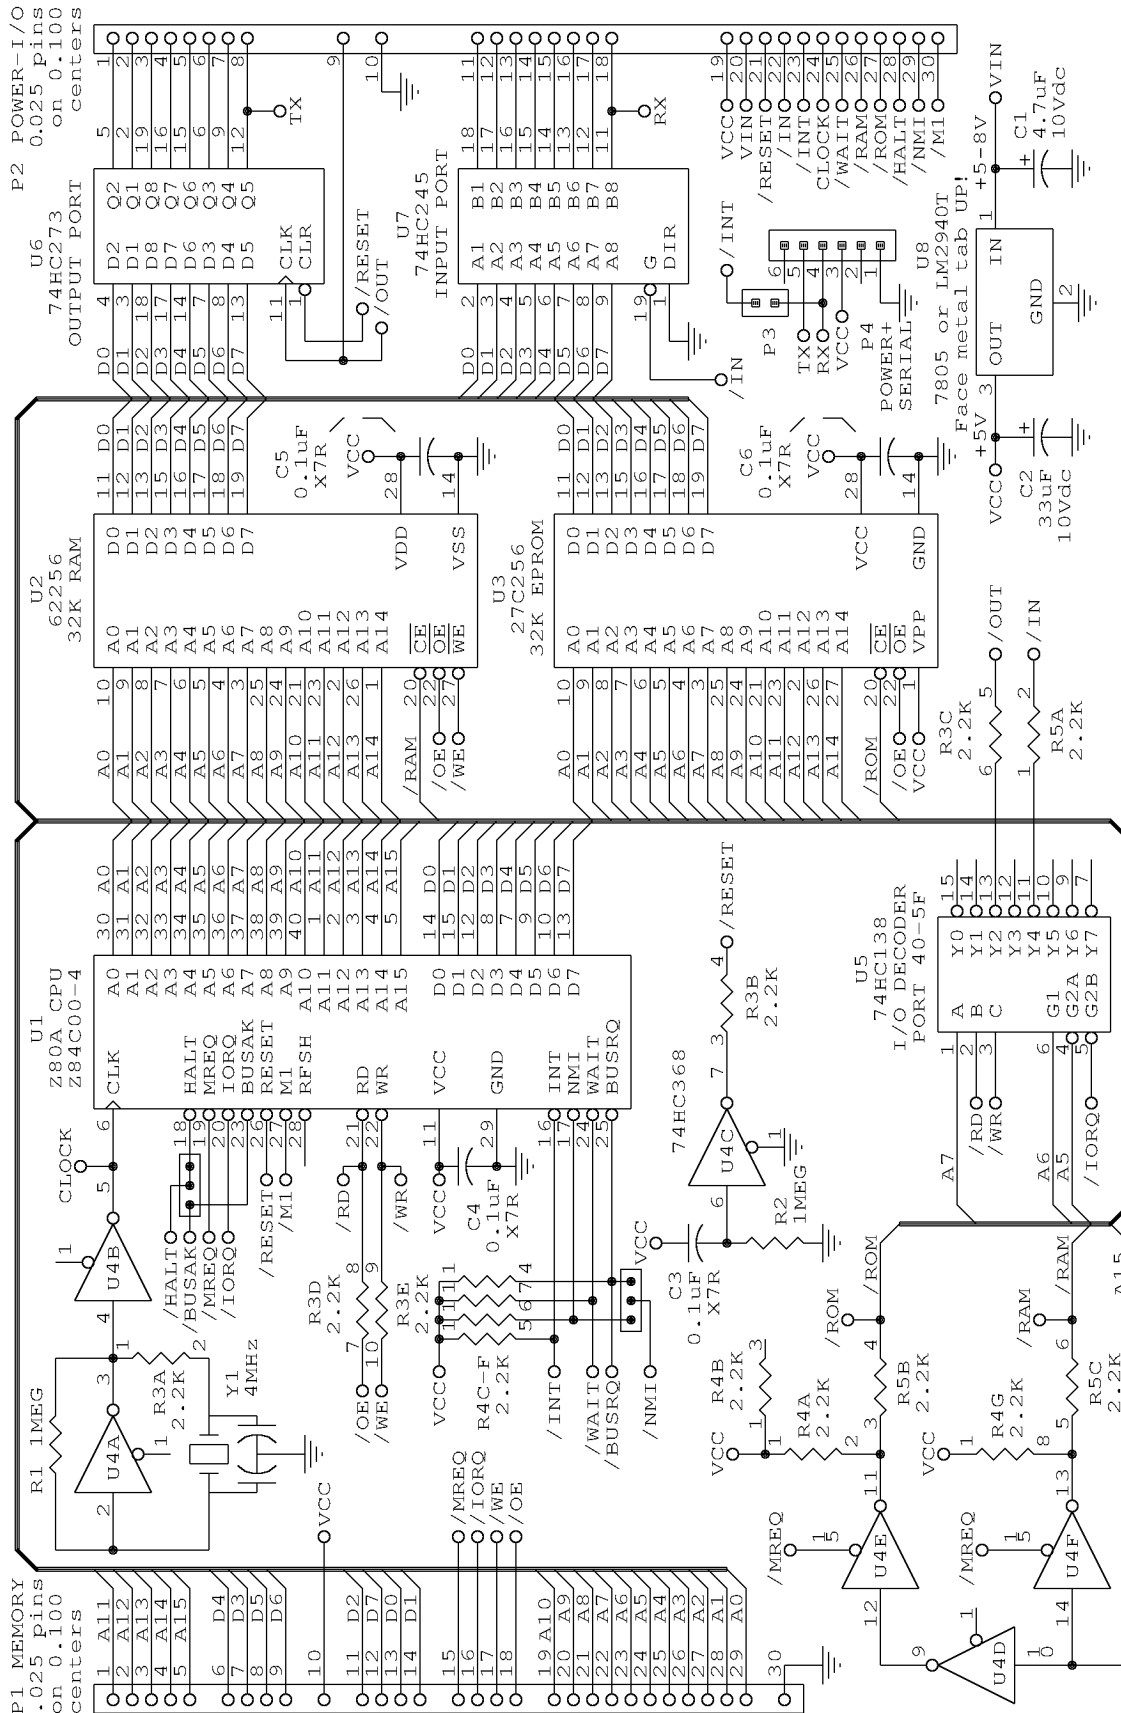

- Notes:
1. All ICs powered by VCC. Uses C1-6, P1-3, R1-5, U1-8, Y1.
 2. ROM at 0-32k, RAM at 32-64k. /RAM, /ROM, /IN, and /OUT can be externally forced high or low to change memory and I/O maps.
 3. Rev.B: Add P4 power-serial connector. Install P4 for stand-alone use, or install U8 on-board regulator to use with daughterboards. Added jumpers for P2-29 = NMI or BUSRQ, P2-28 = HALT or BUSAK.

TMSI c/o Lee Hart

Title		Z80 Membership Card	
Size	Document Number	REV	
A	C:\ORCAD\SHEET\Z80\Z80-MCB.SCH	B	
Date:	March 8, 2020	Sheet	1 of 1

Z80 Machine Code Quick Reference

(C)1976 by Mary Bell

Codes 00-3F

LO \ HI	0.	1.	2.	3.
.0 JR	NOP	DJNZ	NZ	NC
.1 nn→	BC	DE	HL	SP
.2 A→	(BC)	(DE)	HL→(nn)	(nn)
.3 INC	BC	DE	HL	SP
.4 INC	B	D	H	(HL)
.5 DEC	B	D	H	(HL)
.6 n→	B	D	H	(HL)
.7	RLCA	RLA	DAA	SCF
.8 JR	AF→AF'	unc	Z	C
.9 HL+	BC	DE	HL	SP
.A →A	(BC)	(DE)	(nn)→HL	(nn)
.B DEC	BC	DE	HL	SP
.C INC	C	E	L	A
.D DEC	C	E	L	A
.E n→	C	E	L	A
.F	RRCA	RRA	CPL	CCF
LO \ HI	0.	1.	2.	3.

1-byte opcodes (plus n or nn for immediate data)

Codes C0-FF

LO \ HI	C.	D.	E.	F.
.0 RTN	NZ	NC	PO	NM
.1 POP	BC	DE	HL	AF
.2 JMP (nn)	NZ	NC	PO	NM
.3	JMP UNC	OUT (n)	HL→(nn)	DIS INT
.4 CALL (nn)	NZ	NC	PO	NM
.5 PUSH	BC	DE	HL	AF
.6 A/n	+	-	AND	OR
.7 RST	00h	10h	20h	30h
.8 RTN	Z	C	PE	M
.9	RTN	EXX	JMP (HL)	HL→SP
.A	Z	C	PE	M
.B	CNTL BITS	IN (n)	HL→DE	ENA INT
.C CALL (nn)	Z	C	PE	M
.D	CALL UNC	IX for HL	EXT INS	IY for HL
.E A/n	+ /c	- /c	XOR	CPI
.F RST	08h	18h	28h	38h
LO \ HI	C.	D.	E.	F.

ED Extended Instructions

LO \ HI	4.	5.	6.	7.	A.	B.
.0 IN port(c)→	B	D	H		LDI	LDIR
.1 OUT →port(c)	B	D	H		CPI	CPIR
.2 HL-/c	BC	DE	HL	SP	INI	INIR
.3 →(nn)	BC	DE		SP	OUTI	OUTIR
.4	NEG					
.5	RET NMI					
.6	IM0	IM1				
.7	A→I	I→A	RRD			
.8 IN port(c)→	C	E	L	A	LDD	LDDR
.9 OUT →port(c)	C	E	L	A		
.A HL+/c	BC	DE	HL	SP	IND	INDR
.B (nn)→	BC	DE		SP	OUTD	OUTDR
.C						
.D	RET MI					
.E		IM2				
.F	A→R	R→A	RLD			
LO \ HI	4.	5.	6.	7.	A.	B.

2-byte opcodes with ED as 1st byte

Codes 40-BF (Moves, Math & Logic)

								Source Register							
Operations w/A				Destination				B	C	D	E	H	L	(HL)	A
+/c	-/c	XOR	CP	C	E	L	A	.8	.9	.A	.B	.C	.D	.E	.F
+	-	AND	OR	B	D	H	(HL)	.0	.1	.2	.3	.4	.5	.6	.7
8.	9.	A.	B.	4.	5.	6.	7.	LO nibble							
HI nibble															

Note: 76 = HALT: not (HL)→(HL)

Flags

S	Z	--	H	--	P/V	N	C
---	---	----	---	----	-----	---	---

CB Group Instructions

Register								Bit #				Shifts			
B	C	D	E	H	L	(HL)	A	1	3	5	7	RRC	RR	SRA	SRL
.8	.9	.A	.B	.C	.D	.E	.F	0	2	4	6	RLC	RL	SLA	
.0	.1	.2	.3	.4	.5	.6	.7	C.	D.	E.	F.	0.	1.	2.	3.
LO nibble								HI nibble							

The Cast

Chip Hacker

The hardware designer. He starts with a Mark-8, then switches to an Altair 8800, and keeps upgrading it until there's nothing original left of it. Gets tired of all the problems, and buys a Heathkit H8.

When the Z80 comes out, he recognizes it is superior to the 8080, and builds a CPU board with it. Adds memory, then parallel and serial I/O. Then a keypad and LEDs to make a front panel like the H8. It winds up a single-board computer that evolves into the Z80 Membership Card.

Gil Bates

The "idea" man and marketing mangler. Always looking ahead for "the next new thing". He realizes that:

1. Computers are a BIG DEAL that will change the world.
2. The change is happening fast. You can't succeed by copying what other people are doing, or looking just one step ahead.
3. Computers come in big beige boxes. People prefer SMALL packages (calculator-sized) that they can take anywhere.
4. Sees that microcomputers need lots of "hacking" to make them work, but also sees how successful Apple is at selling "computers for the rest of us".
5. Sees that people are insanely focused on CHEAP, but traditional computers are expensive.
6. So he's out to make something Small, Easy to use, and Cheap, but that's ahead of what everyone else is doing.

Tracey (Trace) Weaver

She enters the picture when they need to get PCBs laid out. She works at a firm where she can "borrow" CAD time to do it. Can layout boards that pack the parts much tighter than is normally done at the time (smaller, lower cost).

Willard (Wiz) Wireman

He enters as a tech. Can build things faster than Chip, so things get done quickly. But he has poor attention to detail (thus the inclusion of assembly instructions).

Rich (Crash) Kernigan

Software genius. Writes the software. The name is a play on C creators Dennis Ritchie and Brian Kernighan. I misspelled it on purpose, in case they take offense.

Changes

----- Z80 CPU board

rev.A: R3 was 2k, now 2.2k. C1 was 3.3uF, now 4.7uF.

Changed EPROM program from ZMCv1.1 to ZMCv1.5.

rev.B: Inverted U8 (metal tab up). Added P3 and P4 to support stand-alone operation. Added jumper options for /BUSRQ, /BUSAK.

Front Panel board

rev.B: U4 was 74LS01, now 74HC05.

rev.C: Added D3 (stops TXD from affecting RXD if nothing connected to RXD)
Front Panel R1,2,4 was 10k, now 15k.

rev.D: U5 was LED-photoresistor, now LED-phototransistor optocoupler.